


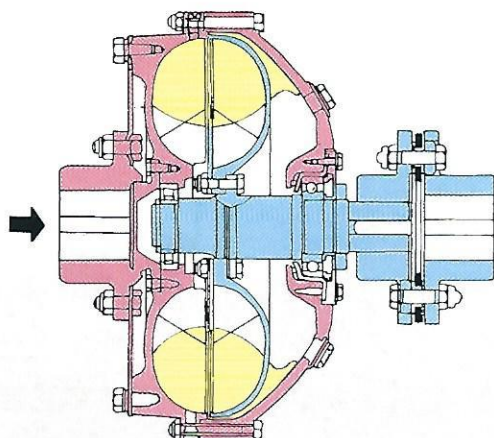

PEMBRIL CONSTANT FILLING FLUID COUPLINGS


TYPE FCU Sizes 8 to 41

SELECTION DATA

TYPE FCU SELECTION TABLE

Size	Max. operating kW rating at various motor speeds.			
	580	720	960	1450
8	-	0.29	0.69	2.36
9.25	0.31	0.60	1.42	4.88
10.5	0.59	1.13	2.68	9.21
11.5	0.96	1.83	4.35	14.01
12.75	1.64	3.13	7.53	26.10
14.5	3.0	5.67	13.42	46.20
16.25	5.44	10.44	24.76	75.00
17.75	8.13	15.51	37.29	120.00
20	15.73	30.13	75.00	151.00
23	30.00	56.70	130.00	275.00
26	58.20	112.00	210.00	455.00
29	101.00	187.00	340.00	615.00
32	155.00	271.00	420.00	837.00
36	273.00	345.00	725.00	--
41	410.00	634.00	1000.00	--

The above chart may be used for selecting a type FCU fluid coupling. It shows maximum operating power ratings for approved application with direct-on started squirrel cage motors, and will allow 200% full load torque for starting. Selections may be different from those shown, for drives having frequent cyclic duty, very high inertia starting, or diesel engine drives, such cases should be referred to Premium Energy Transmission Ltd. office or representative who will prepare specific proposals. These ratings are also generally suitable for drives employing slip-ring motors; for drives using DC motors consult Premium Energy Transmission Ltd. Allow for 3% to 5% slip in fluid coupling - low to high loadings.

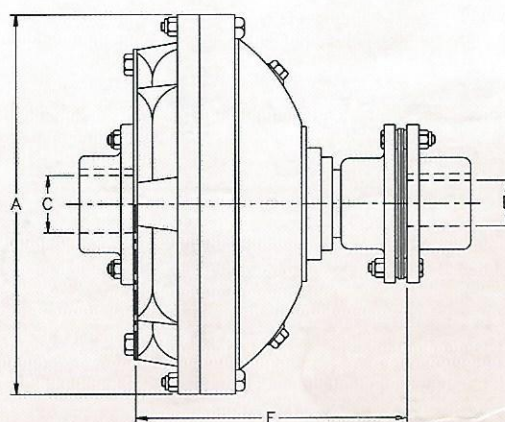

TECHNICAL DATA

Dimensions in mm

Size	A	C	D	E	Filled Weight (Kgs)	GD2-PRI (Kg m ²)	Oil Qty Ltr.
8	237	42	35	165	13.2	0.246	1.7
9.25	268	48	48	194	17.7	0.332	2.6
10.5	308	48	48	210	22.2	0.54	3.7
11.5	333	60	55	232	35	0.75	4.6
12.75	368	60	55	262	41	1.38	6.8
14.5	419	80	70	287	57.6	2.53	10.2
16.25	454	80	70	335	74	4.2	13.6
17.75	502	85	76	354	106	6.4	17
20	578	85	76	390	142	11.5	26
23	660	110	100	457	207	23	40
26	749	110	100	492	272	38	57
29	838	130	115	552	358	65	78
32	914	130	115	587	520	95	106
36	1032	150	150	626	678	182	136
41	1162	150	150	660	948	316	205